




KYORITSU · DIGITAL MULTIMETERS · DATASHEET

Kyoritsu KEW 1030 Pen Type Digital Multimeter

Model KEW 1030 · HSN 9030 3100 · Pen Type Digital Multimeter

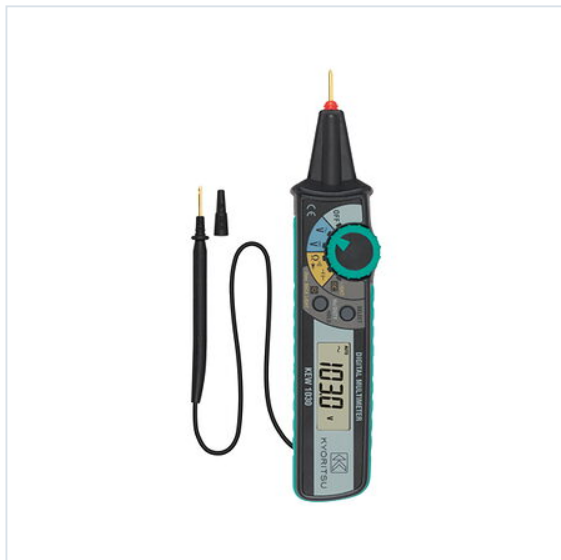

Pen-type 100 g multimeter with a built-in penlight and backlit display for voltage, resistance, capacitance and frequency checks.

Key features

- Pen-type body, approx. 100 g, with double moulding for grip
- Penlight illuminates the measuring point
- Backlit LCD
- Test lead stores in a rear compartment
- DC V, AC V, resistance, continuity, diode, capacitance, frequency and duty cycle
- Data hold button
- IEC 61010-1 CAT III 600 V

Price and availability

Ask Industrial Supply Syndicate for the current price, stock and a quotation with GST and freight. Call +91 8961089611 or WhatsApp +91 89610 89611.

Specifications

Voltage	
DC V	400 mV / 4 / 40 / 400 / 600 V (5-range auto); $\pm 0.8\%$ rdg ± 5 dgt (400 mV–400 V), $\pm 1.0\%$ rdg ± 5 dgt (600 V)
AC V	4 / 40 / 400 / 600 V (4-range auto); $\pm 1.3\%$ rdg ± 5 dgt (4/40 V, 50/60 Hz), $\pm 1.6\%$ rdg ± 5 dgt (400/600 V, 50/60 Hz)
Resistance & Continuity	
Resistance	400 Ω / 4 / 40 / 400 k Ω / 4 / 40 M Ω (6-range auto); $\pm 1.0\%$ rdg ± 5 dgt (400 Ω –4 M Ω), $\pm 2.5\%$ rdg ± 5 dgt (40 M Ω)
Continuity buzzer	Buzzer at 120 Ω or less
Diode test	Test voltage approx. 0.3–1.5 V
Other Functions	
Capacitance	50 / 500 nF / 5 / 50 / 100 μ F (5-range auto); $\pm 3.5\%$ rdg ± 10 dgt (50 nF), $\pm 3.5\%$ rdg ± 5 dgt (500 nF–50 μ F), $\pm 4.5\%$ rdg ± 5 dgt (100 μ F)
Frequency	5 / 50 / 500 Hz / 5 / 50 / 200 kHz $\pm 0.1\%$ rdg ± 5 dgt (input 1.5 V rms or more)
Duty cycle	0.1–99.9% $\pm 2.5\%$ rdg ± 5 dgt
Other	Data hold
Safety	
Measurement category	IEC 61010-1 CAT III 600 V
Standards	IEC 61010-031, IEC 61326-1



General

Power source	LR44 (SR44) 1.5 V × 2
Dimensions	190 (L) × 39 (W) × 31 (D) mm
Weight	Approx. 100 g (including batteries)

What's in the box

- Carrying case (9130)
- Button cell (LR44) × 2
- Instruction manual

Typical applications

- **Field Electrical Testing** – Pen-type 100 g meter with penlight and backlit display.
- **Electrical Maintenance** – Voltage, resistance, continuity and capacitance checks; CAT III 600 V.

Official Kyoritsu documents

[KEW 1030 product catalogue \(English\)](#) PDF · www.kew-ltd.co.jp

[KEW 1030 instruction manual \(English\)](#) PDF · www.kew-ltd.co.jp

Order or ask for a quotation

Industrial Supply Syndicate supplies the Kyoritsu KEW 1030 across India with a GST invoice. Tell us the quantity and delivery location; we reply with a quotation or proforma invoice including freight.

Phone **+91 8961089611**
WhatsApp **+91 89610 89611**
Email **info@kyoritsumeters.in**
Online **kyoritsumeters.in/product/kyoritsu-kew-1030-pen-type-digital-multimeter/**
Address **54, Ezra Street, Kolkata, West Bengal 700000, India**
GSTIN **19ACDPC1843J1ZR**



Scan to WhatsApp us